

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
3 June 2004 (03.06.2004)


PCT

(10) International Publication Number  
**WO 2004/047127 A1**

- (51) International Patent Classification<sup>7</sup>: **H01F 38/14**
- (21) International Application Number:  
PCT/GB2003/004986
- (22) International Filing Date:  
17 November 2003 (17.11.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0226896.9 19 November 2002 (19.11.2002) GB
- (71) Applicant (for all designated States except US):  
**HUNTLEIGH TECHNOLOGY PLC** [GB/GB];  
310-312 Dallow Road, Luton, Bedfordshire LU1 1TD (GB).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **BAILY, Greg** [GB/GB]; 204 Albany Road, Roath, Cardiff CF2 3RY (GB). **LEYSON, Christopher, Thomas** [GB/GB]; 14 Westfield Road, Cardiff CF14 1QQ (GB).
- (74) Agent: **THAKER, Shalini**; Group IP Department, Huntleigh Technology PLC, 310-312 Dallow Road, Luton, Bedfordshire LU1 1TD (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:  
— with international search report  
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: CONNECTOR WITH INDUCTIVE COUPLING

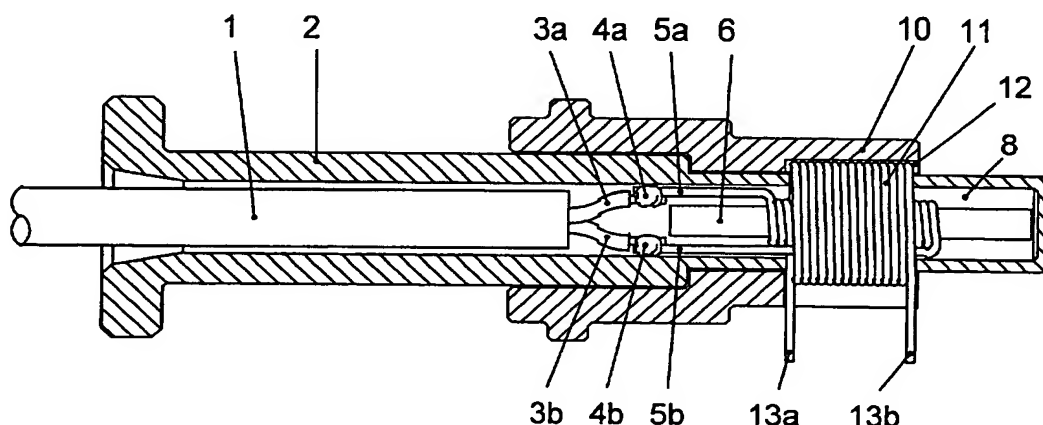

(57) **Abstract:** The inductive coupling for transferring electrical energy to or from a transducer and measuring circuit, consists of a male connector part (2) and a female connector part (10). The male part (2), includes a single layer solenoid (7) wound on a ferromagnetic rod (6), the ends of the solenoid (5a and 5b) connected to conductors (3a and 3b) connected to an ultrasound probe (not shown) via cable (1). The female part (10) includes a single layer solenoid (11). The ends of solenoid (11) are brought out to terminals (12a and 12b) to facilitate electrical connection to the ultrasound drive electronics (not shown). The coupling provides a simple sealed signal connection between the cable connected with the transducer and the measuring circuit electronics without the disadvantages of having exposed contact surfaces. The cable connector can be replaced if desired.

BEST AVAILABLE COPY